

K-HART DIRECT SEEDING DISC DRILLS



INDEPENDENT MID-ROW FERTILIZER COULTERS

K-Hart's independent mid-row fertilizing system allows you the option to choose mid row fertilizer placement for your cereals and small grains, and hydraulically lift them out of the way for pulses, when nitrogen placement is not required.

1) Offset double disc fertilizer openers are set to engage the ground for optimal mid-row fertilizer placement.

2) Openers are hydraulically lifted up and out of the way for seeding pulse and other crops.

3) Hand adjustable depth control allows you to manually set the opener depth.

K-Hart Generation II Frames are built for the harshest seeding conditions. They are the heaviest on the market. A top slung hitch allows you to easily mount the mid-row fertilizer coulters with no hitch to work around. Gen II frames offer hydraulic cylinder levelling fore and aft of the frame, saving time when making seeding depth adjustments. Massive 18 ply tires on 3" spindles and 12,000 lb. hub assemblies carry the heaviest of loads, and will last the lifetime of the drill. 5" folding cylinders ensure that folding into travel position will never be a problem. Powder coated 4" x 6" x 3/8" wall tubular steel frames eliminate all frame twisting and keep your investment looking its best for years to come. Safety transport locks ensure folding safety when moving from field to field. Frame sizes available: 34', 42', 50', 56', 66', 76'.



Box 520, Elrose, SK S0L 0Z0
PH: 306-378-2258
Fax: 306-378-2926

Email: sales@khartindustries.com
www.khartindustries.com

Why K-Hart Disc Drills?

- Seed into wetter soils than most other drills
- Seed faster
- Seed with less horsepower & fuel
- Simplest design on the market
- Perfect combination with stripper header
- 34' to 76' Gen II Drill widths

K-HART^{Gen II} DIRECT SEEDING DISC DRILLS


now with Independent Mid Row Fertilizer Coulters



PARALINK Model 4612



K-Hart Double Disc Openers

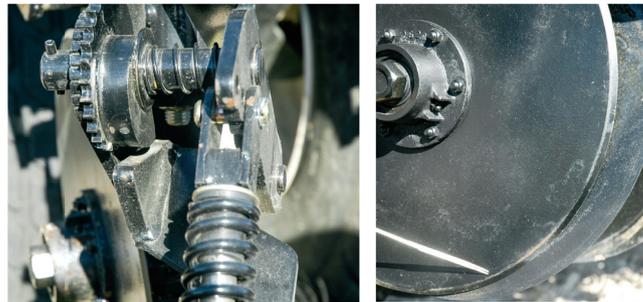

K-Hart exclusive cam stop design ensures consistent seed placement depth. Adjustable in 1/4" increments with no tools required.

1 1/4" offset with 16" and 17" discs provide superior ground and trash slicing ability with 75% less soil disturbance than knife openers.

K-Hart packer wheels are available for K-Hart openers as well as other makes and models of openers.

Model 3612



The model 3612 is a simple, specifically designed double disc no-till opener that rotates on a 1" chrome shaft located in the mount cap for tripping when obstacles are encountered, and having up to 12" of obstacle clearance. A minimum of 80 lbs. to a maximum of 550 lbs. of force can be set for blade down pressure, ensuring a wide range of downpressure settings for varying soil conditions.

A spring loaded packer ensures the seed is packed and off to a healthy start. Choice of swivel or locked packer wheel.

Email: sales@kheartindustries.com
www.kheartindustries.com

Box 520, Elrose, SK S0L 0Z0
PH: 306-378-2258

Fax: 306-378-2926

